

## Miller 8327 Retractable Web Lanyard

### Material


|            |                                     |
|------------|-------------------------------------|
| Housing:   | Stamped steel w/thermoplastic cover |
| Connector: | Aluminum                            |
| Lifeline:  | 1 3/4 in. polyester                 |
| Thread:    | Polyester                           |
| Carabiner: | Zinc plated steel (if applicable)   |
| Swivel:    | Heat treated forged steel           |

### Technical

|                                 |                                                                   |
|---------------------------------|-------------------------------------------------------------------|
| Max. Working Load:              | 310 lbs. (141 kg)                                                 |
| Working Length:                 | 6 ft. (1.8 m)<br>7 ft. (2.1 m)<br>8 ft. (2.4 m)<br>10 ft. (3.0 m) |
| Max. Arrest Distance:           | 39 in. (1.0 m)                                                    |
| Max. Peak Arrest Force:         | 1,800 lbf. (8kN)                                                  |
| Unit Minimum Ultimate Strength: | 3,000 lbf. (13 kN)                                                |

### Certification

Please refer to table on following page.

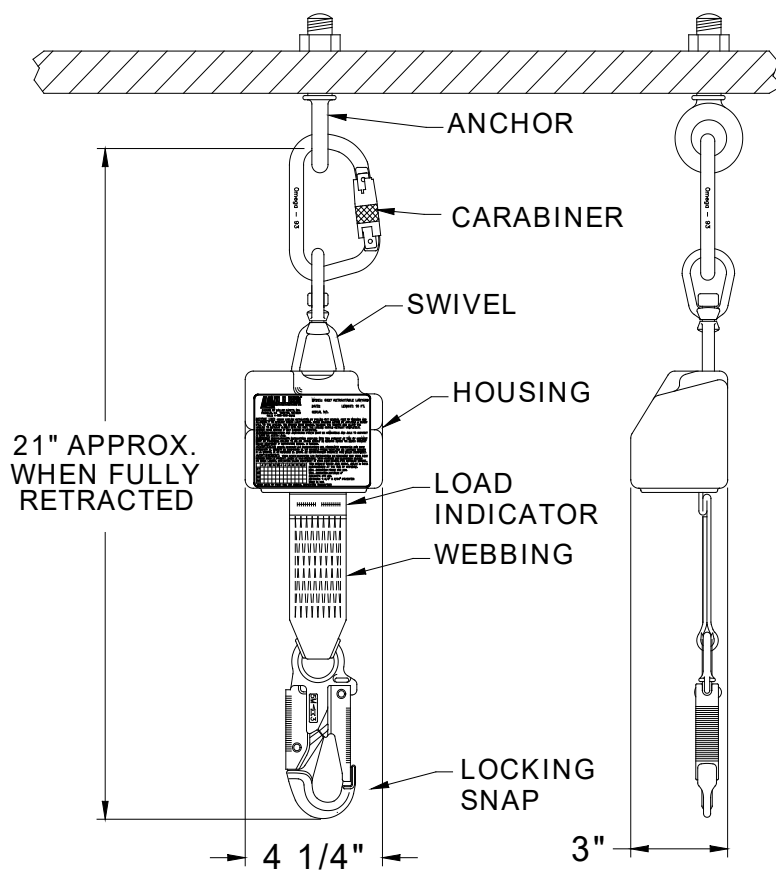

**TECHNICAL DATA**  
SP102 Rev C 5-17

| MODEL NUMBER                                                                                                                                                                     | LIFELINE LENGTH | UNIT CONNECTOR                                | LANYARD END CONNECTOR         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------|-------------------------------|
| OSHA 1926.502 and 1910.66 and CSA Z259.2.2-98 Type 1.<br>Connecting components meet or exceed ANSI Z359.12-2009 and CSA Z259.12-11 for requirements for 3,600 lb. gate strength. |                 |                                               |                               |
| 8327-Z7/6FTYL                                                                                                                                                                    | 6 ft. (1.8 m)   | Swivel Shackle and Steel Twist-lock Carabiner | Aluminum Snap Hook            |
| 8327-Z7/7FTYL                                                                                                                                                                    | 7 ft. (2.1 m)   | Swivel Shackle and Steel Twist-lock Carabiner | Aluminum Snap Hook            |
| 8327-Z7/8FTYL                                                                                                                                                                    | 8 ft. (2.4 m)   | Swivel Shackle and Steel Twist-lock Carabiner | Aluminum Snap Hook            |
| 8327-Z7/10FTYL                                                                                                                                                                   | 10 ft. (3 m)    | Swivel Shackle and Steel Twist-lock Carabiner | Aluminum Snap Hook            |
| 8327A-Z7/10FTYL                                                                                                                                                                  | 10 ft. (3 m)    | Swivel Shackle                                | Aluminum Snap Hook            |
| AD6902-Z7/7FTYL                                                                                                                                                                  | 7 ft. (2.1 m)   | Aluminum Twist-Lock Carabiner                 | Aluminum Twist-Lock Carabiner |
| AD6902-Z7/8FTYL                                                                                                                                                                  | 8 ft. (2.4 m)   | Aluminum Twist-Lock Carabiner                 | Aluminum Twist-Lock Carabiner |
| OSHA 1926.502 and 1910.66                                                                                                                                                        |                 |                                               |                               |
| 8327/6FTYL                                                                                                                                                                       | 6 ft. (1.8 m)   | Swivel Shackle and Steel Twist-Lock Carabiner | Aluminum Snap Hook            |
| 8327/7FTYL                                                                                                                                                                       | 7 ft. (2.1 m)   | Swivel Shackle and Steel Twist-Lock Carabiner | Aluminum Snap Hook            |
| 8327/8FTYL                                                                                                                                                                       | 8 ft. (2.4 m)   | Swivel Shackle and Steel Twist-Lock Carabiner | Aluminum Snap Hook            |
| 8327/10FTYL                                                                                                                                                                      | 10 ft. (3 m)    | Swivel Shackle and Steel Twist-Lock Carabiner | Aluminum Snap Hook            |
| 8327A/7FTYL                                                                                                                                                                      | 7 ft. (2.1 m)   | Swivel Shackle                                | Aluminum Snap Hook            |
| 8327A/8FTYL                                                                                                                                                                      | 8 ft. (2.4 m)   | Swivel Shackle                                | Aluminum Snap Hook            |
| 8327A/10FTYL                                                                                                                                                                     | 10 ft. (3 m)    | Swivel Shackle                                | Aluminum Snap Hook            |
| 832SW/6FTYL                                                                                                                                                                      | 6 ft. (1.8 m)   | N/A                                           | Aluminum Twist-Lock Carabiner |
| 832SW/8FTYL                                                                                                                                                                      | 8 ft. (2.4 m)   | N/A                                           | Aluminum Twist-Lock Carabiner |
| 832SW/10FTYL                                                                                                                                                                     | 10 ft. (3 m)    | N/A                                           | Aluminum Twist-Lock Carabiner |
| AD6902/6FTYL                                                                                                                                                                     | 6 ft. (1.8 m)   | Aluminum Twist-Lock Carabiner                 | Aluminum Twist-Lock Carabiner |
| AD6902/7FTYL                                                                                                                                                                     | 7 ft. (2.1 m)   | Aluminum Twist-Lock Carabiner                 | Aluminum Twist-Lock Carabiner |
| AD6902/8FTYL                                                                                                                                                                     | 8 ft. (2.4 m)   | Aluminum Twist-Lock Carabiner                 | Aluminum Twist-Lock Carabiner |

**Limitless Possibilities. Ask the Expert.**

Technical Service: 800.873.5242  
www.millerfallprotection.com

**Honeywell Industrial Safety**

900 Douglas Pike  
Smithfield, RI 02917

**USA**

Phone: 800.430.5490  
Fax: 800.322.1330

**Canada**

Phone: 888.212.7233  
Fax: 888.667.8477

 This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.